

# Corporate brochure



LIVING WITH HUMANS

**CREATE THE NO.1 BRAND OF OPERATING ROOM AND  
NURSING EQUIPMENT PRODUCTS**

---

Shandong Yuda Medical Device Technology Group Co., LTD

# Company Profile



CE PRODUCT CERTIFICATION FDA CERTIFICATION

- ★ Passed ISO9001, ISO13485 dual system certification
- ★ ISO 14001:2015 Environmental Management System
- ★ China Environmental Labeling Product Certification
- ★ ISO 45001:2018 Occupational Health and Safety Management System
- ★ IECQ QC080000 Hazardous Substance Process Management System
- ★ National High-tech Enterprise 
- ★ China Well-known Trademark

- ★ Shandong Pharmaceutical Industry Association AAA-level Enterprise
- ★ Innovative SMEs in Shandong Province
- ★ Second-level enterprise for safety production standardization
- ★ China Medical Device Management Association
- ★ Provincial Specialized and New SMEs in 2024
- ★ Provincial Science and Technology SMEs in 2024
- ★ Leading enterprise of Jining Industrial Cluster
- ★ Jining Famous Brand Products




Shandong Yuda Medical Equipment Group Co., Ltd. is located in Yanzhou Industrial Park, Shandong Province, covering an area of 200 acres. The company has total assets of 500 million yuan, an annual production capacity of 2 billion yuan, and a registered capital of 100 million yuan. The main products include LED shadowless lamps, various electric and hydraulic operating tables, medical pendant lights, medical suspension bridges, medical nursing beds and other medical equipment.

The company has a set of advanced production lines, more than 70 sets of various CNC processing equipment, a span of 0.1m welding robots and other advanced machinery and equipment. Strong strength, advanced equipment, modern management, and a high-quality workforce have created high-quality Yuda products. The products cover all provinces, cities, and autonomous regions in China, and are sold to Europe, America, Africa, Southeast Asia and other countries and regions. After continuous efforts and development, the company has now become a first-class medical equipment manufacturer in China.

Yuda people, who take coexistence with humans as their corporate spirit, will continue to improve products and services, provide customers with the best products and high-quality services, and make due contributions to social development.

# MEDICAL DEVICE MANUFACTURERS

THE COMPANY WILL BE COMMITTED TO PROVIDING THE BEST PRODUCTS, THE BEST SERVICES, THE HIGHEST REPUTATION AND COMPLETE THE SUPPORTING SERVICES OF MEDICAL DEVICES WITH MODERN PRODUCTION STANDARDS, PERFECT QUALITY MANAGEMENT SYSTEM, PIONEERING AND ENTERPRISING, PRAGMATIC AND INNOVATIVE. WE WILL BE THE BEST QUALIFIED SUPPLIER AND YOUR MOST RELIABLE LONG-TERM STRATEGIC PARTNER.

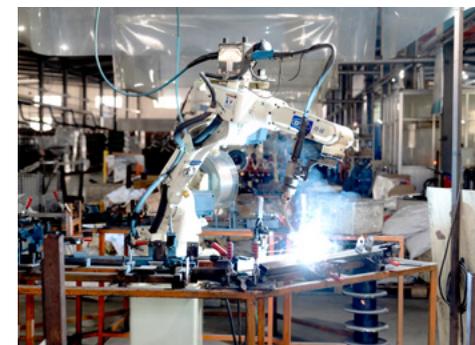

# CERTIFICATE OF HONOR





# | Surgical Light



## Starry Sky: YDE700/500

Double dome design with uniform brightness and starry LED surgical light



### Product Parameter (Specification)

Specification	YDE 700 (Head)	YDE 500 (Head)
Illuminance	40,000 - 160,000 LUX	40,000 - 120,000 LUX
Color Temperature	3000K - 6700K	3000K - 6700K
Color Rendering Index (CRI)	≥ 90	≥ 90
Illumination Depth	≥ 1100mm	≥ 1100mm
Wavelength ≤ 400nm Irradiance	≤ 0.006 W/ m <sup>2</sup>	≤ 0.006 W/ m <sup>2</sup>
Focus Adjustment	Manual	Manual
LED Power / Number of LEDs	1W / 80 LEDs	1W / 48 LEDs
Power Supply	AC 220V, 50Hz	AC 220V, 50Hz
Input Power	100W	80W
Average LED Lifespan	100,000 hours	100,000 hours
Minimum Installation Height	2.8m	2.8m

## Starry Sky: YDE500

Single dome lifting starry sky style 500 diameter LED surgical light



### Product Parameter (Specification)

Item	Specification
Model	YDE500
Illuminance	$\leq 120,000$ Lux
Color Temperature	3000–6700 K
Color Rendering Index (Ra)	$\geq 90$
Illumination Depth	1100 mm
Irradiance (<400nm)	$\leq 0.006$ W/ m <sup>2</sup>
Focus Adjustment	Manual
LED Power / Quantity	1W $\times$ 48 pcs
Power Supply	AC 220V $\pm$ 22V, 50Hz $\pm$ 10Hz
Input Power	80 W
LED Service Life	100,000 hours
Minimum Installation Height	2.8 m



## Starry Sky: YDE700

Single head Starry Sky Multi LED Bead 700 Diameter LED Surgical Light



### Product Parameter (Specification)

Item	Specification
Model	YDE700
Illuminance	40,000–160,000 Lux
Color Temperature	3000–6700 K
Color Rendering Index (Ra)	≥ 90
Illumination Depth	≥ 1100 mm
Focus Adjustment	Manual
LED Power / Quantity	1W × 80 pcs
Power Supply	AC 220V, 50Hz
Input Power	100 W
LED Lifetime	100,000 h
Minimum Installation Height	2.8 m



## Starry Sky Large Lens:YDE700/500

Professional adjustable large curvature lens LED surgical light



### Product Parameter (Specification)

Parameter	Unit	Main Lamp	Auxiliary Lamp
Illuminance	Lux	40000-160000	40000-120000
Color Temperature	K	4000-5500	4000-5500
Color Rendering Index (Ra)	-	≥ 90	≥ 90
Dimming Range	%	10-100	10-100
Surgeon Head Temperature Rise	°C	≤ 0.5	≤ 0.5
Surgical Field Temperature Rise	°C	≤ 2	≤ 2
LED Type	-	Imported	Imported
Average LED Lifespan	h	≥ 60000	≥ 60000
Lens Diameter	mm	≥ 50	≥ 50
LED Quantity	pcs	48 (Main) + 144 (Aux)	24 (Main) + 72 (Aux)
Height Adjustment	cm	≥ 118	≥ 118
LED Heat Sink Height	mm	≥ 33	≥ 33
LED Cover Height	mm	≥ 130	≥ 90
Fan-Shaped Focusing Radius	mm	≥ 280	≥ 200
Power Input	VAC, Hz	100-240, 50/60	100-240, 50/60
Power	W	100	80


## Starry Sky: YDE700

Single head Starry Sky Multi LED Bead 700 Diameter LED Surgical Light



### Product Parameter (Specification)

Parameter	Unit	Lamp
Illuminance	Lux	40000–160000
Color Temperature	K	4000–5500
Color Rendering Index (Ra)	–	≥ 90
Dimming Range	%	10–100
Surgeon Head Temperature Rise	°C	≤ 0.5
Surgical Field Temperature Rise	°C	≤ 2
LED Type	–	Imported
Average LED Lifespan	h	≥ 60000
Lens Diameter	mm	≥ 50
LED Quantity	pcs	48 (Main) + 144 (Aux)
Height Adjustment	cm	≥ 118
LED Heat Sink Height	mm	≥ 33
LED Cover Height	mm	≥ 130
Fan-Shaped Focusing Radius	mm	≥ 280
Power Input	VAC, Hz	100–240, 50/60
Power	W	100

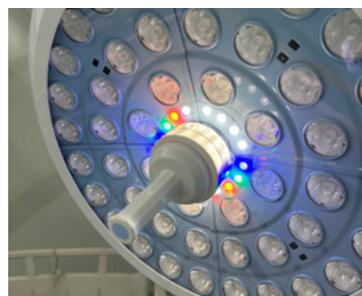

## Starry Sky Large Lens: YDE500

Single head large lens 500 diameter LED surgical light




### Product Parameter (Specification)

Parameter	Unit	Lamp
Illuminance	Lux	40000-120000
Color Temperature	K	4000-5500
Color Rendering Index (Ra)	-	≥ 90
Dimming Range	%	10-100
Surgeon Head Temperature Rise	°C	≤ 0.5
Surgical Field Temperature Rise	°C	≤ 2
LED Type	-	Imported
Average LED Lifespan	h	≥ 60000
Lens Diameter	mm	≥ 50
LED Quantity	pcs	24 (Main) + 72 (Aux)
Height Adjustment	cm	≥ 118
LED Heat Sink Height	mm	≥ 33
LED Cover Height	mm	≥ 90
Fan-Shaped Focusing Radius	mm	≥ 200
Power Input	VAC, Hz	100-240, 50/60
Power	W	80



## Petal: YDE500

Single dome lifting petal shaped LED surgical light

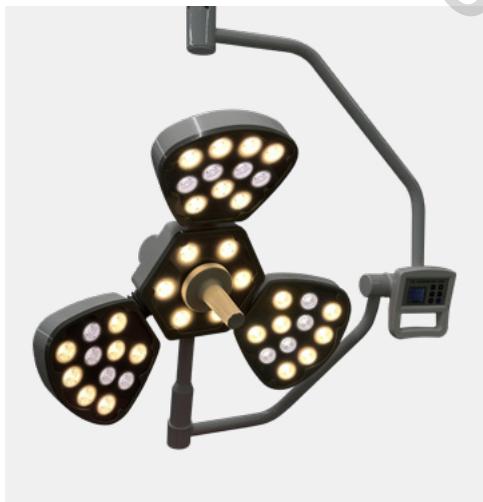


### Product Parameter (Specification)

Item	Specification
Model	500 Lamp Head (3-Petal)
Illuminance	$\leq 120,000$ Lux
Color Temperature	$4300 \pm 500$ K
Light Spot Diameter	100-300 mm
Color Rendering Index (Ra)	$\geq 90$
Illumination Depth	1100 mm
Working Voltage / Power	220 V / 100 W
Endoscope Mode	Standard
LED Service Life	100,000 hours
Minimum Installation Height	2.8 m

**Petal: YDE700**

Single petal style 700 diameter LED surgical light

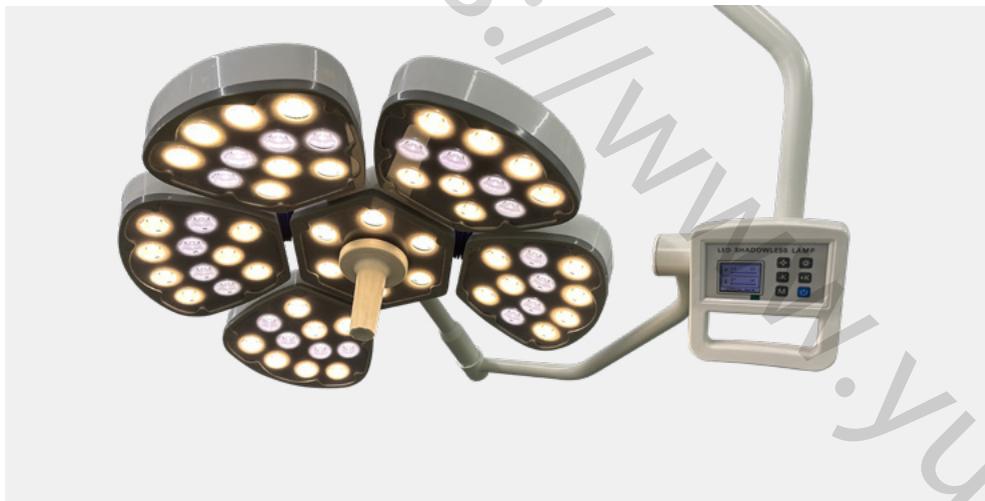

**Product Parameter (Specification)**

Item	Specification
Model	700 LED (5-petal)
Illuminance	≤ 160,000 Lux
Color Temperature	4300 ± 500 K
Light Spot Diameter	100-300 mm
Color Rendering Index (Ra)	≥ 90
Illumination Depth	1100 mm
Operating Voltage / Power	220 V / 100 W
Endoscope Mode	Standard
LED Lifetime	100,000 h
Minimum Installation Height	2.8 m



## Petal: YDE700/700

Double petal design for easy focusing of LED surgical light





### Product Parameter (Specification)

Item	700 Lamp Head (6-Petal)	500 Lamp Head (5-Petal)
Illuminance	$\leq 160,000$ Lux	$\leq 160,000$ Lux
Color Temperature	$4300 \pm 500$ K	$4300 \pm 500$ K
LED Quantity	72	61
Light Spot Diameter	100–300 mm	100–300 mm
Color Rendering Index (Ra)	$\geq 90$	$\geq 90$
Illumination Depth	1100 mm	1100 mm
Working Voltage / Power	220 V / 100 W	220 V / 100 W
Endoscope Mode	Standard	Standard
LED Service Life	100,000 hours	100,000 hours
Minimum Installation Height	2.8 m	2.8 m




## Cross: YDE700/700

Automatic Shadow Compensation High Color Display Electric Cross shaped LED Surgical Light

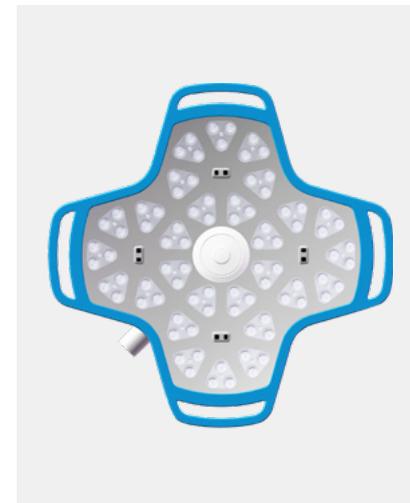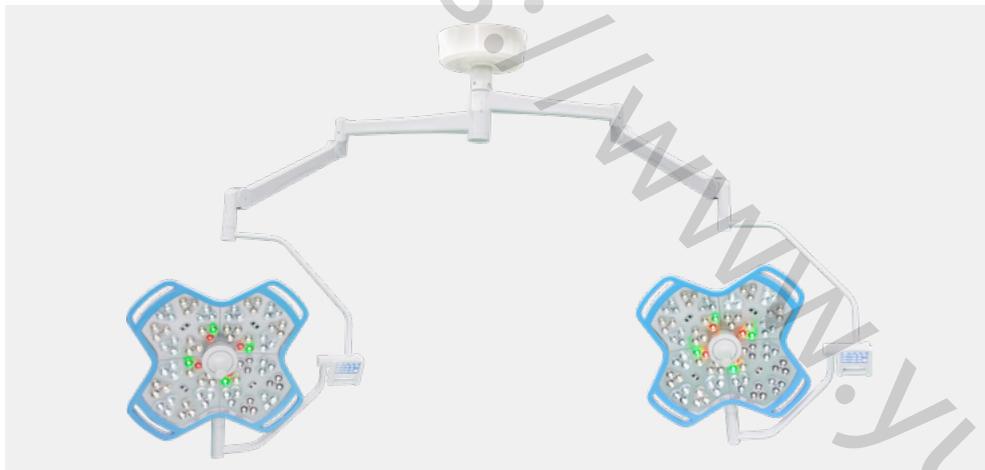


### Product Parameter (Specification)

Item	700 Lamp Head	700 Lamp Head
Illuminance	≤ 160,000 Lux	≤ 160,000 Lux
Color Temperature	3000–6700 K	3000–6700 K
Color Rendering Index (Ra)	≥ 90	≥ 90
Illumination Depth	1100 mm	1100 mm
Irradiance (<400nm)	≤ 0.006 W/ m <sup>2</sup>	≤ 0.006 W/ m <sup>2</sup>
Focus Adjustment	Electronic	Electronic
LED Power / Quantity	1W × 84 pcs	1W × 84 pcs
Power Supply	220V, 50Hz	220V, 50Hz
Input Power	100 W	100 W
LED Service Life	100,000 hours	100,000 hours
Minimum Installation Height	2.8 m	2.8 m

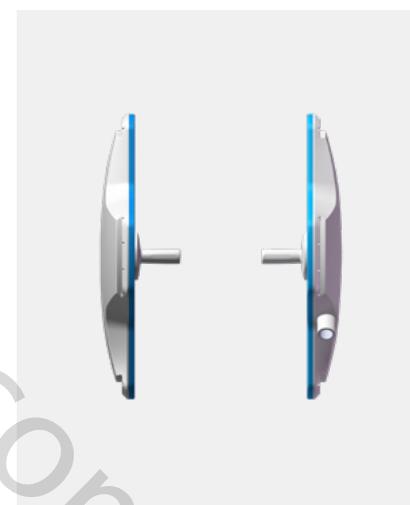

## Diamond: YDE700/700

Diamond lens with excellent light efficiency and durable diamond shaped LED surgical light

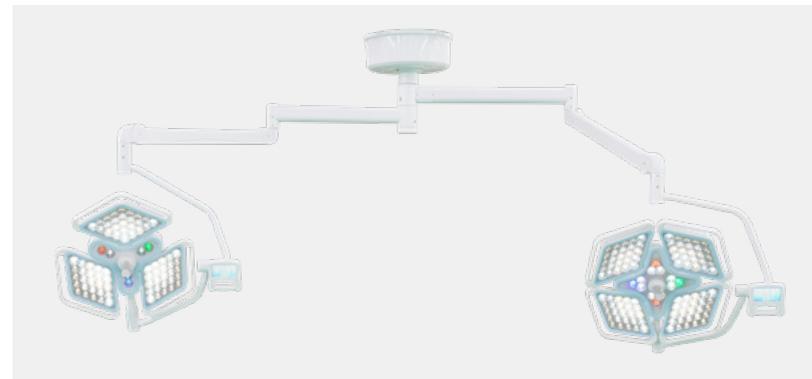

### Product Parameter (Specification)

Item	112-LED Model	81-LED Model
Illuminance	80,000–160,000 Lux	60,000–140,000 Lux
Color Temperature	3700–5000 K	3700–5000 K
Light Spot Diameter	160–350 mm	160–350 mm
Color Rendering Index (Ra)	85–98 (adjustable)	85–98 (adjustable)
Illumination Depth	≥ 1200 mm	≥ 1200 mm
Surgeon Head Temperature	<1° C	<1° C
Power Supply	AC 100–240 V, 50/60 Hz	AC 100–240 V, 50/60 Hz
Input Power	400 W	400 W
LED Quantity	112	81

# 02 Camera Surgical Light

## Double-petal: YDE700/700

Unique design shadow compensation double flap LED surgical light



### Product Parameter (Specification)

Item	700 Lamp Head	700 Lamp Head
Illuminance	40,000-160,000 Lux	40,000-160,000 Lux
Color Temperature	4000-5700 K	4000-5700 K
Color Rendering Index (Ra)	≥ 96	≥ 96
Illumination Depth	≥ 1100 mm	≥ 1100 mm
Irradiance (<400nm)	≤ 0.006 W/ m <sup>2</sup>	≤ 0.006 W/ m <sup>2</sup>
Focus Adjustment	Electronic	Electronic
LED Power / Quantity	1W × 80	1W × 80
Power Supply	220 V, 50 Hz	220 V, 50 Hz
Input Power	100 W	100 W
LED Service Life	100,000 hours	100,000 hours
Minimum Installation Height	2.8 m	2.8 m



## Cross YDE700700TV

High end high-definition integrated image processing camera surgical light

### Product Parameter (Specification)

Item	700 Lamp Head	700 Lamp Head
Illuminance	$\leq 160,000$ Lux	$\leq 160,000$ Lux
Color Temperature	3000-6700 K	3000-6700 K
Color Rendering Index (Ra)	$\geq 90$	$\geq 90$
Illumination Depth	1100 mm	1100 mm
Irradiance (<400nm)	$\leq 0.006$ W/ m <sup>2</sup>	$\leq 0.006$ W/ m <sup>2</sup>

Focus Adjustment	Electronic	Electronic
LED Power / Quantity	1W $\times$ 84 pcs	1W $\times$ 84 pcs
Power Supply	220V, 50Hz	220V, 50Hz
Input Power	100 W	100 W
LED Service Life	100,000 hours	100,000 hours
Minimum Installation Height	2.8 m	2.8 m



## Rhombus 700700TV

Double headed ceiling image processing display camera surgical light



### Product Parameter (Specification)

Item	112-LED Model	81-LED Model		
Illuminance	80,000–160,000 Lux	60,000–140,000 Lux	Illumination Depth	≥ 1200 mm
Color Temperature	3700–5000 K	3700–5000 K	Surgeon Head Temperature	<1° C
Light Spot Diameter	160–350 mm	160–350 mm	Power Supply	AC 100–240 V, 50/60 Hz
Color Rendering Index (Ra)	85–98 (adjustable)	85–98 (adjustable)	Input Power	400 W
			LED Quantity	112
				81

## Petal 5+3YDE700500TV

Double ended medical petal shaped recording and display camera surgical light



### Product Parameter (Specification)

Item	700 Lamp Head (5-Petal)	500 Lamp Head (3-Petal)
Illuminance	40,000–160,000 Lux	40,000–120,000 Lux
Color Temperature	4300±500 K	4300±500 K
Spot Diameter	120–300 mm	120–300 mm
Color Rendering Index (Ra)	≥ 90	≥ 90
Illumination Depth	≥ 1100 mm	≥ 1100 mm
Voltage / Power	220 V / 100 W	220 V / 80 W
Endoscope Mode	Standard	Standard
LED Service Life	100,000 hours	100,000 hours
Minimum Installation Height	2.8 m	2.8 m

# 03 Surgical Illumination Light

## YDE-50D

Portable and movable 7-hole medical examination surgical illumination light

### Product Parameter (Specification)

Item	Specification
Height	1300-1600 mm
Base Diameter	500 mm
Flexible Arm Length	300 mm
Adjustable Height	300 mm
Power Cord Length	2500 mm
Product Weight	3.3 kg
Packing Weight	4.1 kg
Packing Size	1000 × 200 × 90 mm
Illuminance	45,000 Lux (40 cm), 12,000 Lux (80 cm)
Color Temperature	5500 K
Lamp Head Size	φ75 × 120 mm
Dimming	Adjustable / Non-adjustable
LED Quantity	7
Power	7 W
Power Supply	220 V / 50 Hz




**YDE-100D**

Mobile medical examination lighting LED surgical illumination light

**Product Parameter (Specification)**

Item	Specification
Height	1330-1630 mm
Base Diameter	500 mm
Flexible Arm Length	300 mm
Adjustable Height	300 mm
Power Cord Length	2500 mm
Product Weight	3.4 kg
Packing Weight	4.5 kg
Packing Size	1000 × 200 × 125 mm
Illuminance	62,000 Lux (40 cm), 18,000 Lux (80 cm)
Color Temperature	5000 ± 500 K
Color Rendering Index (Ra)	90
Lamp Head Size	φ100 × 120 mm
Dimming	Adjustable / Non-adjustable
LED Quantity	12
Power	12 W
Power Supply	220 V / 50 Hz

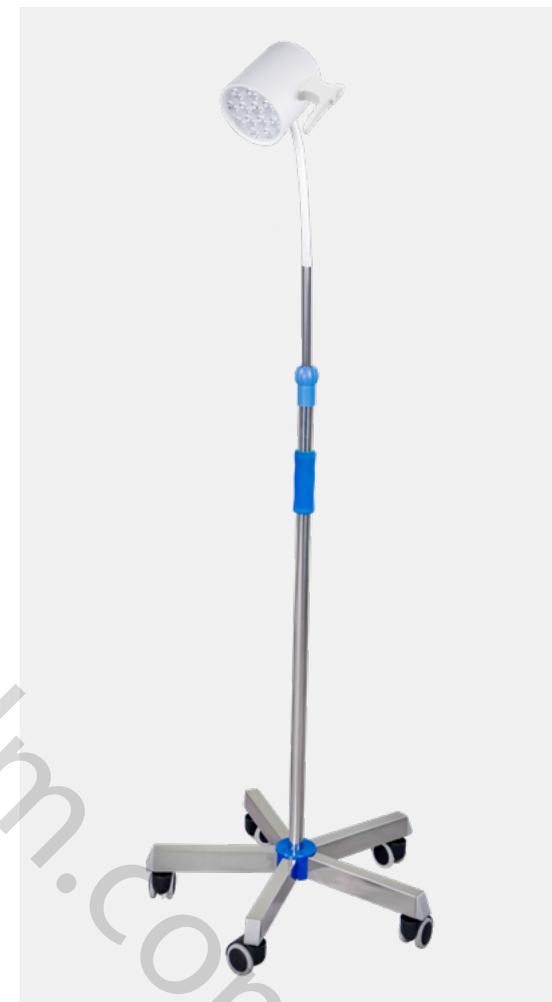


**YDE300B**

Economic standing mobile power Surgical illumination light

**Product Parameter (Specification)**

Item	Unit	YDE300D
Maximum Illuminance	Lux	$\geq 70,000$
Color Temperature	K	$4500 \pm 500$
Color Rendering Index (Ra)	-	$\geq 90$
LED Quantity	pcs	16
Power Supply	V/Hz	220V / 50Hz
Input Power	W	30
LED Average Lifespan	h	100,000
Work Environment	-	+10~+40°C ; 30~75% RH; 500~1060 hPa; AC 220V $\pm$ 22V, 50Hz $\pm$ 10Hz

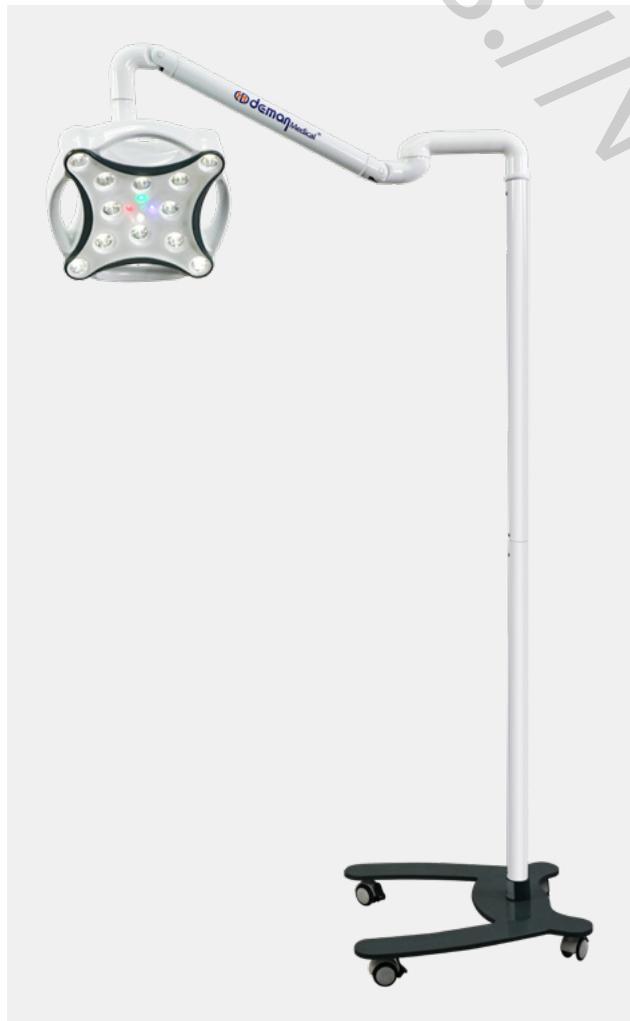

**YDE300C**

High quality cold and warm light floor examination surgical illumination light

**Product Parameter (Specification)**

Item	Unit	YDE300D
Product Height	mm	1330-1630
Base Diameter	mm	500
Goose-Neck Length	mm	300
Adjustable Height	mm	300
Power Cord Length	mm	2500
Product Weight	kg	3.4
Packing Weight	kg	4.5
Packing Size	mm	1000×200×125
Illuminance (40cm)	Lux	62,000
Illuminance (80cm)	Lux	18,000
Color Temperature	K	5000 ± 500
Color Rendering Index (Ra)	-	90
Lamp Head Diameter	mm	φ100 × 120
Adjustable Illumination	-	Dimmable / Fixed
LED Quantity	pcs	12
Power	W	12
Power Supply	V/Hz	220V / 50Hz
LED Average Lifespan	h	100,000
Work Environment	-	+10-+40°C ; 30-75% RH; 500-1060 hPa; AC 220V±22V, 50Hz±10Hz





# | Operating table

This Yuda electric operating table adopts modern advanced technology combined with a user-oriented design concept, meeting imaging observation and diagnostic requirements during surgery. It is a highly versatile operating table suitable for a wide range of surgical procedures including thoracic, cardiovascular, extracorporeal circulation, abdominal, gallbladder, renal, cervical, spinal, urological, gynecological, neurosurgical, rectal, and orthopedic operations (when equipped with a traction frame).

With its precise movement, smooth performance, and durable structure, Yuda aims to be your reliable supplier of advanced surgical solutions.



# 01 Electric Operating Table

## DST-500A (B)

304 stainless steel high-strength tabletop with adjustable electric operating table



## Product Parameter (Specification)

Item	Specification
Table Size	2070mm (L) × 550mm (W) (excluding side rails)
Minimum Height	670mm (without mattress)
Elevation Range	300 ±20mm (electric)
Head Plate	Up 40° ±2° , Down 90° ±2° (manual, two types optional)
Back Plate	Up 80° ±2° , Down 30° ±2° (electric)
Leg Plate	Up 20° , Down 90° , Outward 90° (manual)
Trendelenburg / Reverse	25° ±2° each (electric)
Lateral Tilt	Left 22° ±2° , Right 22° ±2° (electric)
Longitudinal Shift	350 ±20mm (electric)
Max Load Capacity	300kg
Power Supply	AC 220V, 50Hz, 750VA
Noise Level	< 60dB
Brake System	Electric brake
Casters	4 universal wheels (diameter ≥ 100mm)



## DST-500A (C)

Dual controller operation is convenient, high-performance adjustable electric operating table



### Product Parameter (Specification)

Item	Specification
Table Size	2070mm (L) × 550mm (W) (excluding side rails)
Minimum Height	670mm (without mattress)
Elevation Range	300 ±20mm (electric)
Head Plate	Up 40° ±2° , Down 90° ±2° (manual, two types optional)
Back Plate	Up 80° ±2° , Down 30° ±2° (electric)
Leg Plate	Up 20° , Down 90° , Outward 90° (manual)
Trendelenburg / Reverse	25° ±2° each (electric)
Lateral Tilt	Left 22° ±2° , Right 22° ±2° (electric)
Longitudinal Shift	350 ±20mm (electric)
Max Load Capacity	300kg
Power Supply	AC 220V, 50Hz, 750VA
Noise Level	< 60dB
Brake System	Electric brake
Casters	4 universal wheels (diameter ≥ 100mm)



## DST-1A Deluxe version

Anti glare ABS bottom cover, independent power system, waterproof electric operating table



### Product Parameter (Specification)

Item	Specification
Table Size	2070mm (L) × 550mm (W) (excluding side rails)
Minimum Height	670mm (without mattress)
Elevation Range	300 ± 20mm (electric)
Head Plate	Up 40° ± 2°, Down 90° ± 2° (manual, two types optional)
Back Plate	Up 80° ± 2°, Down 30° ± 2° (electric)
Leg Plate	Up 20°, Down 90°, Outward 90° (manual)
Trendelenburg / Reverse	25° ± 2° each (electric)
Lateral Tilt	Left 22° ± 2°, Right 22° ± 2° (electric)
Longitudinal Shift	350 ± 20mm (electric)
Max Load Capacity	300kg
Power Supply	AC 220V, 50Hz, 750VA
Noise Level	< 60dB
Brake System	Electric brake
Casters	4 universal wheels (diameter ≥ 100mm)

## DST-2

Automatic noise free ophthalmic electric operating table



### Product Parameter (Specification)

Item	Specification
Total Length	2150mm (including head plate)
Table Width	600mm (including side rails)
Minimum Height	590 ±20mm (with mattress)
Elevation Range	240 ±20mm (electric)
Head Plate Lift	90 ±20mm (manual)
Back Plate Tilt	Up 65° ±2° , Down 20° ±2°



# 02 Electric Hydraulic Operating Table

## DST-3T type base

Hospital high-strength and durable linear guide stable electric hydraulic operating table


### Product Parameter (Specification)

Item	Specification
Table Size	2150mm (L) × 540mm (W) +10mm (including side rails)
Height (without mattress)	Max. 1000mm ±20mm, Min. 660mm ±20mm
Elevation Range	340 ±20mm (electric)
Trendelenburg / Reverse Tilt	Head down 25° ±2° , Foot down 25° ±2° (electric)
Leg Plate Adjustment	Up 28° ±2° , Down 90° ±2° (manual)
Back Plate Adjustment	Up 65° ±2° , Down 35° ±2° (electric)
Head Plate Adjustment	Up 30° ±2° , Down 90° ±2° (manual)
Table Horizontal Shift	330 ±20mm (electric)
Lateral Tilt	Left 22° ±2° , Right 22° ±2° (electric)
Max Load Capacity	300kg
Item	Specification
Table Size	2150mm (L) × 540mm (W) +10mm (including side rails)
Height (without mattress)	Max. 1000mm ±20mm, Min. 660mm ±20mm
Elevation Range	340 ±20mm (electric)



## DST-3 is at an extremely low level

Multi functional electric ultra-low position patented design electric hydraulic surgical table

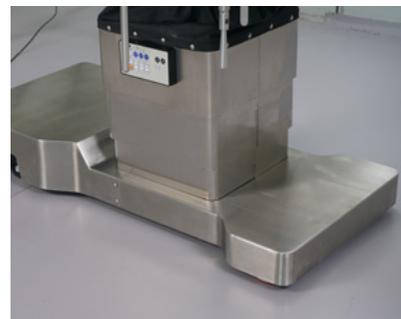


### Product Parameter (Specification)

Item	Specification
Table Size	2070mm (L) × 520mm (W) ±10mm
Height (without mattress)	Max. 1040mm ±20mm, Min. 540mm ±20mm
Elevation Range	≥ 300mm (electric)
Front/Back Tilt	Forward tilt ≥ 30°, Backward tilt ≥ 30°
Lateral Tilt	Left tilt ≥ 20°, Right tilt ≥ 20°
Head Plate Adjustment	Up ≥ 50°, Down ≥ 90°
Back Plate Adjustment	Up ≥ 80°, Down ≥ 40°
Leg Plate Adjustment	Up ≥ 10°, Down ≥ 90°, Outward ≥ 90°
Horizontal Shift	≥ 300mm
Waist Bridge Stroke	≥ 140mm
Item	Specification
Table Size	2070mm (L) × 520mm (W) ±10mm
Height (without mattress)	Max. 1040mm ±20mm, Min. 540mm ±20mm
Elevation Range	≥ 300mm (electric)



## DST-600T

large wheel design and stable base meet the requirements of X-ray perspective electric hydraulic operating table

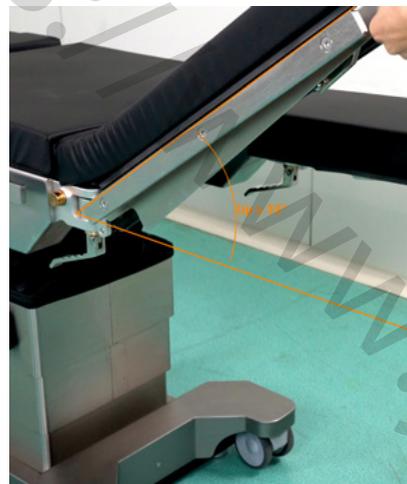


### Product Parameter (Specification)

Item	Specification
Table Size	2170mm (L) × 521mm (W) ±10mm
Height (without mattress)	Min. 530mm ±20mm, Max. 1030mm ±20mm
Elevation Range	500mm ±20mm (electric)
Horizontal Shift	350mm ±20mm (electric)
Waist Bridge Stroke	120mm ±20mm (electric)
Head Tilt	30° ±2° (electric)
Foot Tilt	30° ±2° (electric)
Lateral Tilt	Left 25° ±2°, Right 25° ±2° (electric)
Back Plate Adjustment	Up 80° ±2°, Down 40° ±2° (electric)
Leg Plate Adjustment	Up 35° ±5° (manual), Down 90° ±5° (manual), Outward 90° ±5° (manual)
Head Plate Adjustment	Up 60° ±5° (manual), Down 90° ±5° (manual)
Power Supply	220V 50Hz 300VA
Max Load Capacity	560kg

# 03 Interventional Operating Table

## JR9000

High end all carbon fiber electric imaging interventional operating table

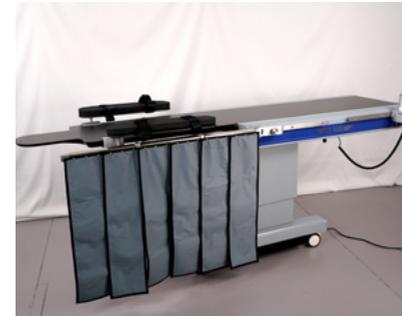


### Product Parameter (Specification)

Item	Specification
Overall Length	2500mm $\pm$ 10mm
Visible Length	1750mm $\pm$ 10mm
Non-metal Inspection Length	1200mm $\pm$ 5mm
Overall Width (with side rails)	690mm $\pm$ 5mm
Visible Width	465mm
Thickness	35mm
X-ray Absorption Coefficient (Aluminum Equivalent)	$\leq$ 0.73mmAL
Max Load Capacity	240kg
Lateral Movement	Manual, 240mm $\pm$ 20mm
Lateral Locking	Electromagnetic Locking
Longitudinal Movement	Manual, 770mm $\pm$ 20mm
Longitudinal Locking	Electromagnetic Locking
Vertical Movement	Electric, Min. Height: 770mm $\pm$ 20mm, Max. Height: 1050mm $\pm$ 20mm
Vertical Stroke	280mm $\pm$ 20mm



## DST-700G is regular

Carbon fiber electric orthopedic navigation imaging operating table

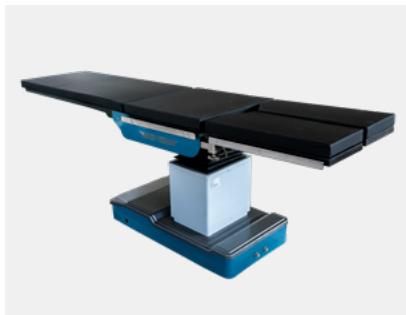

### Product Parameter (Specification)

Item	Specification
Bed Size	2350mm (L) × 585mm (W) ±10mm
Min Height (without mattress)	730mm ±20mm
Max Height (without mattress)	1030mm ±20mm
Elevation Range	300mm ±20mm (electric)
Longitudinal Shift	250mm ±20mm (electric)
Head Tilt Angle	20° ±2° (electric)
Foot Tilt Angle	20° ±2° (electric)
Lateral Tilt Angle	Left 25° ±2°, Right 25° ±2° (electric)
Backrest Angle	Up 60° ±2°, Down 20° ±2° (electric)
Leg Plate Angle	Up 35° ±5° (manual), Down 90° ±5° (manual)
One-Touch Reset Function	Yes
Max Load Capacity	300kg
Electric Brake System	Yes
Battery Capacity	50-80 surgeries on full charge

# 04 Gynecological Operating Table

## DST-3003 Deluxe Edition

Low noise gynecological examination and delivery luxury operating table

### Product Parameter (Specification)

Item	Specification
Table Size	2058mm (L) × 1080mm (W) × 550mm (H)
Minimum Height	550mm ±10mm
Net Weight	305kg
Power Supply	AC 230V, 2.5A, 50Hz
Elevation Range	360mm ±10mm (electric)
Backrest Angle	Up 60° ±2° , Down 10° ±2° (electric)
Seat Angle	Up 25° ±2° , Down 25° ±2° (electric)
Foot Support Plate Rotation Angle	Right 0° ~ 33° ±3° , Left 0° ~ 33° ±3° (electric)
Foot Support Plate Angle	0° ~ 90° ±2° (manual gas spring)
Leg Plate Angle	75° ±2° (manual)
Side Armrest Rotation Angle	180° (manual)
Tray Support Plate Horizontal Movement	150mm ±3mm (manual)
Tray Support Plate Rotation Angle	90° ±3° (manual)
Rotating Tray Support Plate Horizontal Movement	60mm ±5mm (manual)



## DST-3003

High quality multi-purpose economical gynecological operating table




### Product Parameter (Specification)

Item	Specification
Table Size	2058mm (L) × 1080mm (W) × 550mm (H)
Minimum Height	550mm ±10mm
Net Weight	305kg
Power Supply	AC 230V, 2.5A, 50Hz
Elevation Range	360mm ±10mm (electric)
Backrest Angle	Up 60° ±2° , Down 10° ±2° (electric)
Seat Angle	Up 25° ±2° , Down 25° ±2° (electric)
Foot Support Plate Rotation Angle	Right 0° ~ 33° ±3° , Left 0° ~ 33° ±3° (electric)
Foot Support Plate Angle	0° ~ 90° ±2° (manual gas spring)
Leg Plate Angle	75° ±2° (manual)
Side Armrest Rotation Angle	180° (manual)
Tray Support Plate Horizontal Movement	150mm ±3mm (manual)
Tray Support Plate Rotation Angle	90° ±3° (manual)
Rotating Tray Support Plate Horizontal Movement	60mm ±5mm (manual)



## DST-5

Streamlined and flexible adjustable gynecological electric operating table

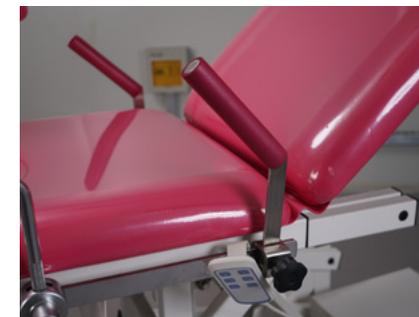

### Product Parameter (Specification)

Item	Specification
Model	DST-5
Length	1380mm (without auxiliary plate) 1880mm (with auxiliary plate)
Width	600mm
Maximum Table Height	950mm (with mattress)
Minimum Table Height	570mm (with mattress)
Maximum Backward Tilt	12°
Backrest Upwards Angle	60°
Auxiliary Plate Size	560mm x 500mm (optional)



## DST-5A

A3 steel welding process, hand cranked paper adjustable electric gynecological operating table



### Product Parameter (Specification)

Item	Specification
Model	DST-5 (A Model)
Length	1680mm (without auxiliary plate)
Width	1040mm
Maximum Table Height	850mm (with mattress)
Minimum Table Height	570mm (with mattress)
Backrest Angle	Up 65°
Footrest Rotation	180°



## AF03 Electric model

Electric lifting American gynecological electric operating table



### Product Parameter (Specification)

Parameter	Specification
Tabletop Size	1520mm × 720mm
Table Height	650-900mm
Backrest Maximum Angle	70° ±5°
Seat Maximum Angle	7° ±2°
Elevation Range	250mm

# 05 Electric Operating Table

## AFO3 Manual version


A3 steel welding process, hand cranked paper adjustable electric gynecological operating table



### Product Parameter (Specification)

Item	Specification
Table Size	1520mm (L) × 740mm (W)
Table Height	900mm
Backrest Angle	Up to 70° ±5°
Seat Angle	Up to 7° ±2°
Footrest Size	450mm × 230mm
Outer Packaging Dimensions	1250mm × 680mm × 900mm
Mattress Packaging Dimensions	1590mm × 800mm × 200mm
Weight Capacity	220kg



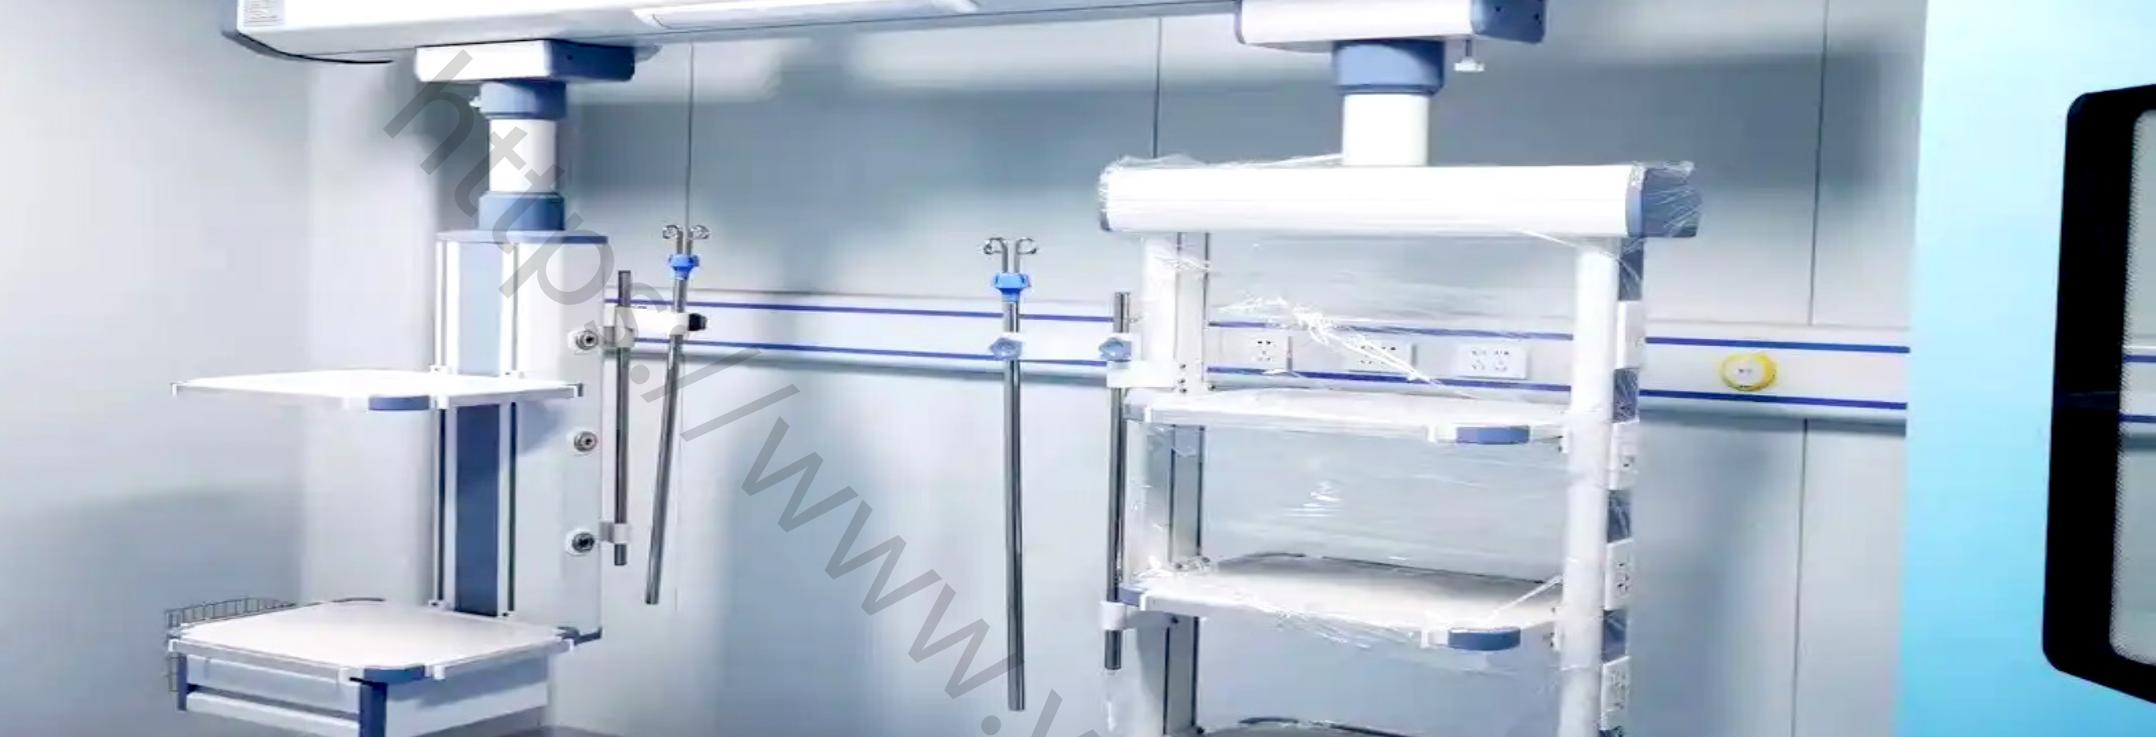

# **SUSPENSION TOWER SERIES**



# SINGLE-ARM SURGICAL TOWER

## DMYL-3200



### Product Parameter (Specification)

Installation method	Suspended ceiling type
Cantilever rotation radius	$\geq 660\text{mm}$
Cantilever rotation angle	340°
Box rotation angle	340°
Instrument platform	550x400mm,2pcs
Drawer	1pcs
Infusion stand	1 set
Gas terminal	National standard:2 oxygen, 2 negative pressure suction,2 air
Power socket	10pcs
Network interface	1pcs
Telephone interface	1 pcs
Ground terminal	2pcs
Customer needs	Customizable

# ARM SURGICAL TOWER

## DMYL-3200-2



### Product Parameter (Specification)

Installation method	Suspended ceiling type
Cantilever rotation radius	$\geq 560\text{mm}+460\text{mm}$
Cantilever rotation angle	340°
Box rotation angle	340°
Instrument platform	550x400mm,2 pcs
Drawer	1 pcs
Infusion stand	1 set
Gas terminal	National standard:2 oxygen, 2 negative pressure suction,2air
Power socket	10 pcs
Network interface	1pcs
Telephone interface	1 pcs
Ground terminal	2pcs
Customer needs	Customizable

# SINGLE-ARM MECHANICAL ENDOSCOPIC TELESCOPE

## DMYL-3600



## Product Parameter (Specification)

Installation method	Suspended ceiling type
Cantilever rotation radius	≥ 660mm
Cantilever rotation angle	340°
Box rotation angle	340°
Instrument platform	550x400mm,3 pcs
Drawer	1 piece
Infusion stand	1 piece
Gas terminal	National standard:2 oxygen,2 compressed air,2 negative pressure suction;
Power socket	10 pcs
Network interface	1pcs
Telephone interface	1pcs
Ground terminal	2pcs
Customer needs	Customizable

# MECHANICAL ENDOSCOPIC ARM TOWER

## DMYL-3600-2



## Product Parameter (Specification)

Installation method	Suspended ceilingtype
Cantlever rotation radius	>560+460mm
Cantlever rotation angle	340.
Boxrotation angle	340.
Instrument platform	550x400mm,3pleces
Drawor	1 piece
Infusion stand	1 piece
Gas terminal	National standard:2 arxygen,2 compressedair,2 negative pressure suction;
Power sochet	10 pcs
Network interface	1pcs
Telephone intorfance	1pcs
Ground terminal	2pcs
Customer needs	Customizable

# MULTIFUNCTIONAL MEDICAL COLUMN

## DMYL-580



## Product Parameter (Specification)

Installation method	Suspended ceiling type
Cantilever rotation radius	/
Cantilever rotation angle	/
Box rotation angle	340°
Instrument platform	550x400mm,2pcs
Drawer	1pcs
Infusion stand	1set
Gas terminal	National standard:2 oxygen units Negative pressure suction 2,air2
Power socket	10pcs
Network interface 行	1pcs
Telephone interface	1pcs
Ground terminal	2pcs
Customer needs	Customizable

# MOBILE MEDICAL UNIT

## DMYL-580Y



### Product Parameter (Specification)

Installation method	Mobile	Power socket	8pcs
Cantilever rotation radius	/	Network interface	1pcs
Boxrotation angle	340°	Telephone interface	1pcs
Instrument platform	600x400mm,2pcs	Ground terminal	2pcs
Drawer	1pcs	Extension line	3000mm
Infusion stand	1pcs	Customer demand	Customizable
Gas terminal	National standard:2 oxygen,2 negative pressure suction, 2 air		

# BEAM-TYPE SUSPENSION BRIDGE (DRYING AND WETTING SEPARATION)

## DMYL-180-E/X



## Product Parameter (Specification)

Installation method	Suspended ceiling type	
Bridge length	2800mm (can be customized on site)	
	Wet zone(Xzone)	Dry area (E area)
Left and right translation distance	$\geq 380$	$\geq 380$
Box rotation angle	340°	340°
Instrument platform	550x400mm,3 pcs	550x400mm,2 pcs
Drawer	1pc	1pc
Infusion stand	1 set	1 set
Gas terminal	National standard:2 oxygen,2 negative pressure suction, 2 air	National standard:2 oxygen,2 negative pressure suction, 2 air
Power socket	10pc	10pc
Network interface	1pc	1pc
Telephone interface	1pc	1pc
Ground terminal	2pc	2pc
LED lighting	1pc	1pc
Customer needs	Customizable	

# BEAM-TYPE SUSPENSION BRIDGE (DRY-WET COMBINED)

## DMYL-180-X



## Product Parameter (Specification)

Installation method	Ceiling type
Bridge length	2800mm(customizable on site)
Left and right translation distance	$\geq 380$
Box rotation angle	340°
Instrument platform	550x400mm,3 pcs
Drawer	1 pcs
Infusion stand	1 set
Gas terminal	National standard:2 oxygen,2 negative pressure suction, 2 air
Power socket	10
Network interface	1
Telephone interfac	e 1
Ground terminal	2
LED lighting	2
Customer needs	Customizable



# **NURSING BED SERIES**



# 01 Electric Hospital Bed

## DHC-IV(DM10)

Modern design electric multifunctional adjustable 5-function weighing electric hospital bed



### Product Parameter (Specification)

Item	Parameter
Bed Surface Size	Without rails: (1950×900)±10mm With rails: (2160×1030)±10mm
Height from Ground	Min: 500±20mm Max: 830±20mm
Lifting Stroke	330±20mm (electric)
Head/Foot Tilt	Head down: 12° ±2° , Foot down: 15° ±2° (electric)
Backrest Angle	75° ±5° (electric)
Legrest Angle	45° ±5° (electric)
Noise	<60dB
Power	220V 50Hz 350VA
Net Weight	120-150kg
Max Load	240kg



## DHC-IV(DM09)

Multifunctional electric hospital bed



### Product Parameter (Specification)

Project	Parameter
External Dimension	(2200x1050)±10mm
Mattress platform	(1950x900)±10mm
Height adjustment	(500~830)±20mm(electric)
Trendelenburg	12° ±2° (electric)
Reverse Trendelenburg	15° ±2° (electric)
Back-rest adjustment	65° ±5° (electric)
Knee-rest adjustment	35° ±5° (electric)

**DHC-IV(DM08)**

Multifunctional electric hospital bed

**Product Parameter (Specification)**

Item	Parameter
Overall Size	L2270×W1060×H550/950mm
Bed Surface	L1950×W910mm
Lifting Stroke	≥ 400mm
Backrest Angle	≥ 65°
Legrest Angle	≥ 35°
Head/Foot Tilt	≥ 12°
Lateral Tilt	≥ 15°
Weight Measurement	Accuracy 50–100g, real-time display
Maximum Load	240kg
Casters	Dual-sided central locking, Ø150mm, three-mode lock
Power	Silent medical DC motor, smooth and safe operation



**DHC-IV(DM06)**

Multifunctional electric hospital bed



**Product Parameter (Specification)**

Project	Parameter
External Dimension	(2275x1070)±10mm
Mattress platform	(1940x900)±10mm
Height adjustment	(530~730) ±20mm(electric)
Trendelenburg	12° ±2° (electric)
Reverse Trendelenburg	15° ±2° (electric)
Back-rest adjustment	65° ±5° (electric)
Knee-rest adjustment	35° ±5° (electric)



## DHC-IV(DM05)

Luxurious electric nursing and high comfort stable electric hospital bed



### Product Parameter (Specification)

Item	Parameter
Overall Size	L2310×W1100×H480/820mm
Bed Surface	L1950×W910mm
Lifting Stroke	≥ 400mm
Backrest Angle	≥ 70°
Legrest Angle	≥ 40°
Head/Foot Tilt	≥ 12°
Bed Load Capacity	280kg
Weight Measurement	Accuracy 50–100g, real-time display
Casters	Double-sided, Ø125mm, three-mode central lock, silent and corrosion-resistant
Power	UL-certified silent motor, smooth and safe operation
Additional Features	CPR levers, drainage hooks, mattress anti-slip devices, battery backup, under-bed lighting



**DHC-III(DM04)**

Multifunctional electric hospital bed



**Product Parameter (Specification)**

Height adjustment $\geq$ 360mm
Back-rest adjustment $\geq$ 70°
Knee-rest adjustmen $\geq$ 40°
Trendelenburg $\geq$ 12° ; Reverse Trendelenburg $\geq$ 12°
European style four small guardrails, up and down flip structure
Luxury central control casters, with three-stage central controllocking device of locking, straight travel and free
Back one-button CPR function
The bed board adopts anti-beta board, which can be used for wholebody X-ray shooting
Calf board can be adjusted in 2 stages



Constraint fixed position threeplaces on each side



Two-stage adjustment of calf board



Central control brake



One-button CPR



X-ray film cassette



Anti-collision wheels

## DHC-II

(Upright function)



## Product Parameter (Specification)

The electric standing bed manually controls the bed to stand up, assisting the patient to transition from the lying position to the upright position for standing training, so as to effectively stimulate proprioception, improve lower limb muscle strength and lower limb control ability, and prevent postural hypotension.

The electric standing bed is mainly composed of a bed surface, a bed frame, a foot pedal, a handheld controller, a control box, an electric push rod, an armrest table (optional fixing belt and casters).

It has four separate casters, which can control the casters to be suspended or landed. It is inconvenient to fix and use, with foot caps, non-slip and wear-resistant; it adopts a split-leg design to facilitate the fixation of the lower limbs and knees. It has an emergency stop function.

Project	Parameters	Project	Parameters
Bed Specifications	1945mmX845mmX1105mm	Standing Angle	≤ 85°
Bed Surface Specifications	1860mmX610mm	Adjustable Height from Ground	450mm~800mm
Armrest table board	810mmX800mm	Maximum Safe Load	180kg



Electric push rod



Brake pedal



Foot pedal  
(angle adjustable)



high density sponge



Fiber straps



Armrest table board  
(optional)

**DHC-3(APE-5)**

High quality breathable silent electric adjustable 5-function electric hospital bed

**Product Parameter (Specification)**

Item	Parameter
Overall Size	2150×1060×500mm
Backrest Adjustment	≥ 75°
Legrest Adjustment	≥ 35°
Side Rails	European-style flip-up ABS, 4 sections
Bedboard	1.2mm cold-rolled steel, concave multi-hole design
Frame	60×30×1.5mm square tube, robotic welded, supports ≥ 240kg
Casters	Dual-sided, Ø125mm, central locking, stable and quiet
Hand Crank	Stainless steel foldable, dual-direction neutral safety lock
Additional Features	Infusion pole inserts, drainage hooks



## DHCII(6001)

Accompanying Obstetrics and Gynecology Delivery and Nursing Electric hospital Bed




### Product Parameter (Specification)

Item	Parameter
Table Size	1920±20mm × 920±20mm
Table Height	Min 600±10mm, Max 890±10mm
Backrest Angle	Up to 65° ±5°
Table Tilt	Front 5° ±2° , Back 5° ±2°
Legboard Angle	Split legboard: upper 55° ±2° , lower 5° ±2° , detachable
Electric Pelvic Lift	Up 10° ±2° (optional)
Power Supply	220V±22V, 50Hz
Load Capacity	200kg
Net Weight	100kg



## 02 Manual Hospital Bed

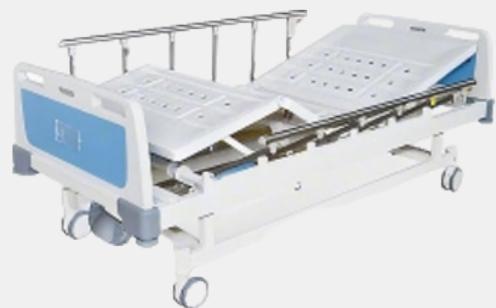

**AA-7**

2-function manual hospital bed

SIZE:2120x960x500mm



**AA-8**

2-function manual hospital bed

SIZE:2120x960x500mm



**APE-7**

2-function manual hospital bed

SIZE:2120x960x500mm




**APE-10**

2-function manual hospital bed

SIZE:2120x960x500mm

## AO-1

High quality breathable silent electric adjustable 5-function electric hospital bed

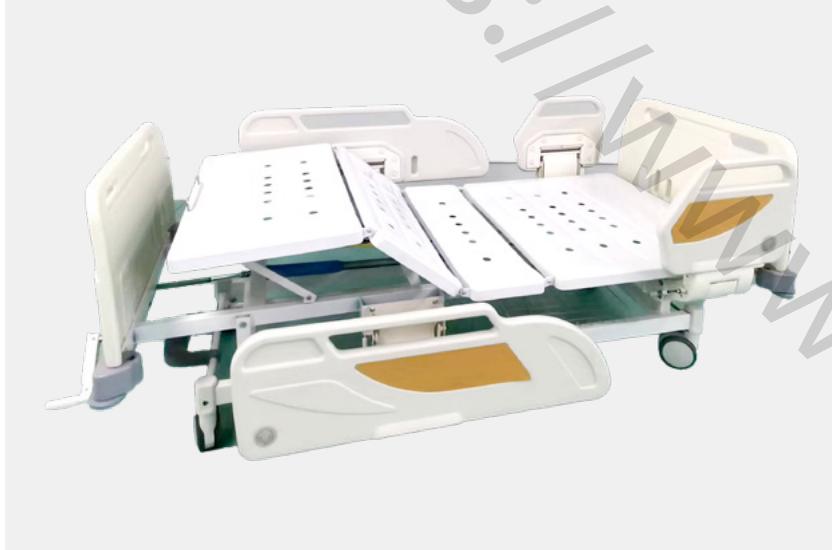

### Product Parameter (Specification)

Item	Parameter
Overall Length	2240±20mm
Overall Width	1030±20mm
Height (from floor to bedboard)	500±20mm
Backrest Adjustment	≥ 75°
Legrest Adjustment	≥ 35°
Load Capacity	240kg
Bedboard & Frame	Cold-rolled steel with antibacterial powder coating
Head/Foot Boards & Rails	ABS / PE resin molded
Casters	Ø125mm central locking, dual-sided, stable and silent
Drainage Hooks	4 (two per side)
Infusion Pole Inserts	F:2, H:2
Movable Functions	Back lift, Leg lift



**AO-2**

High quality silent and manually adjustable mobile three crank manual hospital bed

**Product Parameter (Specification)**

Item	Parameter
Overall Length	2240±20mm
Overall Width	1030±20mm
Bedboard Size	1950×830mm ±20mm
Backrest Adjustment	≥ 75°
Legrest Adjustment	≥ 35°
Bed Height (floor to bedboard)	Min 420±20mm, Max 780±20mm
Casters	Ø125mm central locking
Load Capacity	240kg
Drainage Hooks	2 (one per side)
Infusion Pole Inserts	F:2, H:2
Side Rails	Flip-up ABS with angle indicator
Corner Anti-Collision Wheels	Yes
Motion Mechanism	Manual crank with threaded rod linkage
Operating Temperature	-15°C ~60°C
Storage/Transport Temperature	10°C ~40°C
Humidity Range	10%~90% (no condensation)
Atmospheric Pressure	500hPa~1060hPa

# 03 Electric diagnostic bed (ultrasound examination bed)

## DHC-IV

Ultrasound diagnosis and treatment bed



### Product Parameter (Specification)

Size:L2110mmxW780mm
Height adjustment:310mm (including mattress)
Back-rest adjustment $\geq 70^\circ$
Longitudinal travel $300\text{mm}\pm 20\text{mm}$
seat plate elevation $100\text{mm}\pm 20\text{mm}$
Trendelenburg $\geq 12^\circ$ ;Reverse Trendelenburg $\geq 12^\circ$
One-button reset
Equipped with electric paper roll system, button control stops when released, easy to use
Battery charging indicator




Silent casters



Stainless steel handrail



Electric paper passing function



Independent hip lifting system



Intelligent deviation correction and paper changing system



Three stage central control brake



Electric hand controller



Emergency stop



### AZ-4 (Model A)

Size:L2070mmXW720mmXH650mm

The bed surface is made of 40mm thick high-density sponge and wrapped in high-end leather

The bed legs are made of 50x50mm steel pipes and equipped with anti slip adjustable foot pads which are stable and durable

Equipped with an electric paper rolling system, with button control to release and stop convenient to use

Adopting two dual control systems, equipped with manual and foot switches for easy operation



### AZ-4 (Model B)

Size:L2110mmXW720mmXH620mm

The bed surface is made of 40mm thick high-density sponge and wrapped in high-end leather

The bed legs are made of 50x50mm steel pipes and equipped with anti slip adjustable foot pads which are stable and durable

Equipped with an electric paper rolling system, with button control to release and stop, convenient to use

Adopting two dual control systems, equipped with manual and foot switches for easy operation Bottom with bed storage cabinet



### AZ-4 (Model C)

Size:L2100mmXW770mmXH620-900mm

Height adjustment:280mm

Carrying capacity(normal state):170KG

Trendelenburg:  $\geq 12^\circ$

Reverse Trendelenburg:  $\geq 12^\circ$

## AZ-4 (Model D)



### Product Parameter (Specification)

Bed size:L2070mmxW720mmxH550mm~900mm

Height adjustment: 350mm

Mattress size:1900mm x650mm

Paper roll width 600mm

Back-rest adjustment75°

Equipped with 125mm diameter medical double-sided brake casters.  
(Center control casters are optional)

The hand controller can control bed lifting, back lifting, one-button bedsheet replacement, one-button CPR and other functions.

The end of the bed is equipped with a stainless steel handle to facilitate the movement of the bed.

Aluminum alloy four-stage guardrails (optional)ensure patient safety duringbed lifting and lowering.



Stainless steel handrails



Electric bed sheet changer



Optional four-speed guardrail



125φ Silent casters

## 04 Electric massage bed



### D4-1 Product Parameter (Specification)

Size:L1980xW650xH580~900(±10mm)

Comfortable high-rebound sponge, skin-friendly leather, thick and scratch-resistant

Silent caster design, light stepping to move, lifting and pulling to brake

Medical-grade motor, large thrust, good stability



### D4-2 Product Parameter (Specification)

Size:L1980mmxW650mmxH580~900(±10mm)

Back-rest adjustment  $\geq 70^\circ \pm 5$ (manual)

Comfortable high-rebound sponge, skin-friendly leather, thick and scratch-resistant

Silent caster design, light step to move, lift and pull to brake

Medical-grade motor, large thrust, good stability



### D4-3 Product Parameter (Specification)

Size:L1980mmxW650mmxH580~900(±10mm)
Back-rest adjustment $\geq 70^\circ \pm 5$ (manual)
Comfortable high-rebound sponge, skin-friendly leather, thick and scratch-resistant
Silent caster design, light step to move, lift and pull to brake
Medical-grade motor, large thrust, good stability



### D4-4 Product Parameter (Specification)

Size:L1980mmxW650mmxH580~900(±10mm)
Head plate $-60^\circ \sim 0 \sim 60^\circ$ ; Flex $0 \sim 20^\circ$ ; Leg plate $0 \sim 70^\circ$
Bed body high-quality cold-rolled steel pipe 60X30 X1.5mm
Imported robot welding, high quality, solid bed
High-quality antibacterial powder electrostatic spraying, environment-friendly and antibacterial
Comfortable high-rebound sponge, skin-friendly leather thick and scratch-resistant
The bed is divided into three sections, head section, waist and chest section, lower body section
Silent caster design, light stepping to move, lifting and pulling to brake
Medical-grade motor, large thrust, good stability



# | WARD FURNITUREE





**ACZ-06**

Treatment trolley

SIZE:620x690x960mm



**ACF-04**

Medicine delivery trolley

SIZE:775X635X910mm



**ACQ-05**

Emergency care trolley

SIZE:785X480X940mm



**ACM-06**

Anesthesia trolley

SIZE:780x480x990mm



**ACF-02**

Medicine delivery trolley

SIZE:780X485X995mm



**ACH-07**

Nursing trolley

SIZE:1120X480X995mm



**ACZ-04**

Treatment trolley

SIZE:785X480X995mm



**ACS-02**

Infusion trolley

SIZE:785X480X995/1520mm



**ACF-03**

Medication trolley

SIZE:762X520X1045mm



**ACS-03**

Infusion trolley

SIZE:762X520X955mm



**ACQ-06**

Emergency care trolley

SIZE:780x520x1050mm



**ACM-07**

Anesthesia trolley

SIZE:780x520x1050mm



**ACZ-05**

Treatment trolley

SIZE:762X520X955mm



**ZXQ-01**

Emergency care trolley

SIZE:800x500x990mm



**ZXZ-01**

Treatment trolley

SIZE:750x450x910mm



**ZXZ-02**

Treatment trolley

SIZE:790x500x990mm



**ZXF-01**

Medication trolley

SIZE:800x500x990mm



**ZXH-01X**

Nursing trolley

SIZE:1140x500x995mm



**ZXM-01**

Anesthesia trolley

SIZE:800x500x990mm



**ZXS-01**

Infusion trolley

SIZE:790x500x990mm



# **| STAINLESS STEEL TROLLEY SERIES**





**AB13**

Stainless steel instrument trolley

SIZE:750x450x910mm



**AB14**

Stainless steel instrument trolley

SIZE:1400x500x910mm



**AB15**

Stainless steel instrument trolley

SIZE:750x450x910mm



**AB16**

Stainless steel treatment trolley

SIZE:750x450x910mm



**AB18**

Stainless steel treatment trolley

SIZE:750x450x910mm



**AB19**

Stainless steel dressing change trolley

SIZE:700x420x930mm



**AB20**

Stainless steel emergency trolley

SIZE:770x420x900mm



**AB21**

Stainless steel emergency trolley

SIZE:770x420x900mm



**AB23**

Stainless steel anesthesia trolley

SIZE:650x450x880mm



**AB24**

Stainless steel anesthesia trolley

SIZE:650x450x880mm



**AB26**

Stainless Steel Medication Trolley

SIZE:570x400x785mm



**AB28**

Stainless steel infusion trolley

SIZE:750x450x940/1630mm



**AB29**

Stainless steel delivery trolley

SIZE:1000x530x940mm ( 满 1410mm)

**CREATE THE NO.1 BRAND OF OPERATING ROOM AND  
NURSING EQUIPMENT PRODUCTS**



**FACEBOOK**



**YOU TUBE**



**WEBSITE**

---

**www.yudamd.com | +86 186 5374 1100**  
**Shandong Yuda Medical Device Technology Group Co., LTD**

Note: In the interest of continuous improvement, specifications may change without prior notice. Final configurations are subject to the confirmed order and technical agreement.