



| Operating Tables

This Yuda electric operating table adopts modern advanced technology combined with a user-oriented design concept, meeting imaging observation and diagnostic requirements during surgery. It is a highly versatile operating table suitable for a wide range of surgical procedures including thoracic, cardiovascular, extracorporeal circulation, abdominal, gallbladder, renal, cervical, spinal, urological, gynecological, neurosurgical, rectal, and orthopedic operations (when equipped with a traction frame).

With its precise movement, smooth performance, and durable structure, Yuda aims to be your reliable supplier of advanced surgical solutions.



01 Electric Operating Table

DST-500A (B)

304 stainless steel high-strength tabletop with adjustable electric operating table



Product Parameter (Specification)

Item	Specification
Table Size	2070mm (L) × 550mm (W) (excluding side rails)
Minimum Height	670mm (without mattress)
Elevation Range	300 ±20mm (electric)
Head Plate	Up 40° ±2° , Down 90° ±2° (manual, two types optional)
Back Plate	Up 80° ±2° , Down 30° ±2° (electric)
Leg Plate	Up 20° , Down 90° , Outward 90° (manual)
Trendelenburg / Reverse	25° ±2° each (electric)
Lateral Tilt	Left 22° ±2° , Right 22° ±2° (electric)
Longitudinal Shift	350 ±20mm (electric)
Max Load Capacity	300kg
Power Supply	AC 220V, 50Hz, 750VA
Noise Level	< 60dB
Brake System	Electric brake
Casters	4 universal wheels (diameter ≥ 100mm)



DST-500A (C)

Dual controller operation is convenient, high-performance adjustable electric operating table



Product Parameter (Specification)

Item	Specification
Table Size	2070mm (L) × 550mm (W) (excluding side rails)
Minimum Height	670mm (without mattress)
Elevation Range	300 ±20mm (electric)
Head Plate	Up 40° ±2° , Down 90° ±2° (manual, two types optional)
Back Plate	Up 80° ±2° , Down 30° ±2° (electric)
Leg Plate	Up 20° , Down 90° , Outward 90° (manual)
Trendelenburg / Reverse	25° ±2° each (electric)
Lateral Tilt	Left 22° ±2° , Right 22° ±2° (electric)
Longitudinal Shift	350 ±20mm (electric)
Max Load Capacity	300kg
Power Supply	AC 220V, 50Hz, 750VA
Noise Level	< 60dB
Brake System	Electric brake
Casters	4 universal wheels (diameter ≥ 100mm)



DST-1A Deluxe version

Anti glare ABS bottom cover, independent power system, waterproof electric operating table



Product Parameter (Specification)

Item	Specification
Table Size	2070mm (L) × 550mm (W) (excluding side rails)
Minimum Height	670mm (without mattress)
Elevation Range	300 ±20mm (electric)
Head Plate	Up 40° ±2° , Down 90° ±2° (manual, two types optional)
Back Plate	Up 80° ±2° , Down 30° ±2° (electric)
Leg Plate	Up 20° , Down 90° , Outward 90° (manual)
Trendelenburg / Reverse	25° ±2° each (electric)
Lateral Tilt	Left 22° ±2° , Right 22° ±2° (electric)
Longitudinal Shift	350 ±20mm (electric)
Max Load Capacity	300kg
Power Supply	AC 220V, 50Hz, 750VA
Noise Level	< 60dB
Brake System	Electric brake
Casters	4 universal wheels (diameter ≥ 100mm)



DST-2

Automatic noise free ophthalmic electric operating table



Product Parameter (Specification)

Item	Specification
Total Length	2150mm (including head plate)
Table Width	600mm (including side rails)
Minimum Height	590 ±20mm (with mattress)
Elevation Range	240 ±20mm (electric)
Head Plate Lift	90 ±20mm (manual)
Back Plate Tilt	Up 65° ±2° , Down 20° ±2°




02 Electric Hydraulic Operating Table

DST-3T type base

Hospital high-strength and durable linear guide stable electric hydraulic operating table



Product Parameter (Specification)

Item	Specification
Table Size	2150mm (L) × 540mm (W) +10mm (including side rails)
Height (without mattress)	Max. 1000mm ±20mm, Min. 660mm ±20mm
Elevation Range	340 ±20mm (electric)
Trendelenburg / Reverse Tilt	Head down 25° ±2° , Foot down 25° ±2° (electric)
Leg Plate Adjustment	Up 28° ±2° , Down 90° ±2° (manual)
Back Plate Adjustment	Up 65° ±2° , Down 35° ±2° (electric)
Head Plate Adjustment	Up 30° ±2° , Down 90° ±2° (manual)
Table Horizontal Shift	330 ±20mm (electric)
Lateral Tilt	Left 22° ±2° , Right 22° ±2° (electric)
Max Load Capacity	300kg
Item	Specification
Table Size	2150mm (L) × 540mm (W) +10mm (including side rails)
Height (without mattress)	Max. 1000mm ±20mm, Min. 660mm ±20mm
Elevation Range	340 ±20mm (electric)

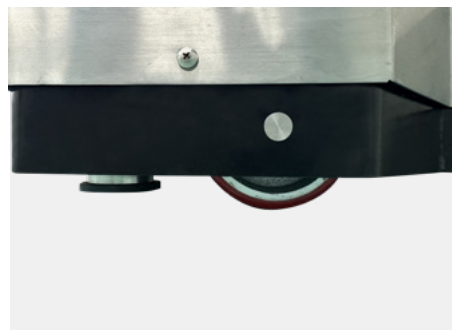


DST-3 is at an extremely low level

Multi functional electric ultra-low position patented design electric hydraulic surgical table

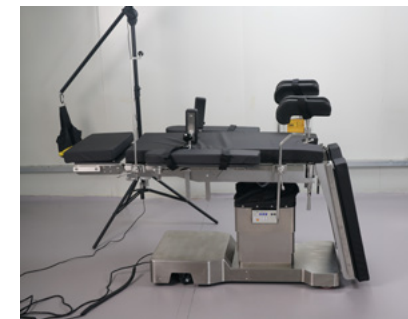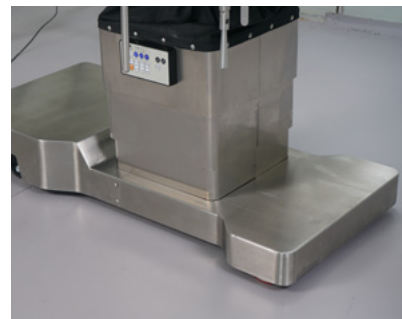

Product Parameter (Specification)

Item	Specification
Table Size	2070mm (L) × 520mm (W) ±10mm
Height (without mattress)	Max. 1040mm ±20mm, Min. 540mm ±20mm
Elevation Range	≥ 300mm (electric)
Front/Back Tilt	Forward tilt ≥ 30°, Backward tilt ≥ 30°
Lateral Tilt	Left tilt ≥ 20°, Right tilt ≥ 20°
Head Plate Adjustment	Up ≥ 50°, Down ≥ 90°
Back Plate Adjustment	Up ≥ 80°, Down ≥ 40°
Leg Plate Adjustment	Up ≥ 10°, Down ≥ 90°, Outward ≥ 90°
Horizontal Shift	≥ 300mm
Waist Bridge Stroke	≥ 140mm
Item	Specification
Table Size	2070mm (L) × 520mm (W) ±10mm
Height (without mattress)	Max. 1040mm ±20mm, Min. 540mm ±20mm
Elevation Range	≥ 300mm (electric)

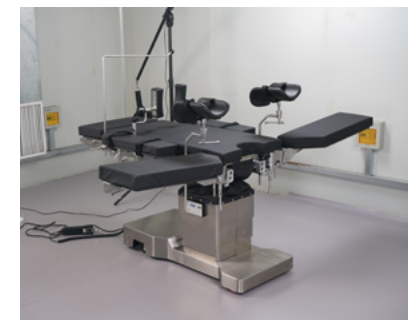

DST-600T

large wheel design and stable base meet the requirements of X-ray perspective electric hydraulic operating table




Product Parameter (Specification)

Item	Specification
Table Size	2170mm (L) × 521mm (W) ±10mm
Height (without mattress)	Min. 530mm ±20mm, Max. 1030mm ±20mm
Elevation Range	500mm ±20mm (electric)
Horizontal Shift	350mm ±20mm (electric)
Waist Bridge Stroke	120mm ±20mm (electric)
Head Tilt	30° ±2° (electric)
Foot Tilt	30° ±2° (electric)
Lateral Tilt	Left 25° ±2°, Right 25° ±2° (electric)
Back Plate Adjustment	Up 80° ±2°, Down 40° ±2° (electric)
Leg Plate Adjustment	Up 35° ±5° (manual), Down 90° ±5° (manual), Outward 90° ±5° (manual)
Head Plate Adjustment	Up 60° ±5° (manual), Down 90° ±5° (manual)
Power Supply	220V 50Hz 300VA
Max Load Capacity	560kg

03 Interventional Operating Table

JR9000

High end all carbon fiber electric imaging interventional operating table

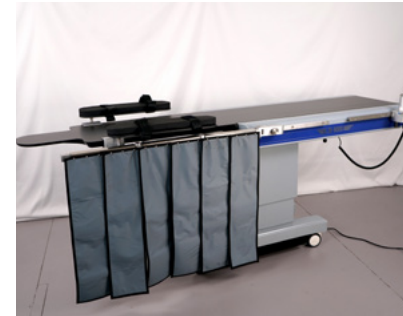



Product Parameter (Specification)

Item	Specification
Overall Length	2500mm ±10mm
Visible Length	1750mm ±10mm
Non-metal Inspection Length	1200mm ±5mm
Overall Width (with side rails)	690mm ±5mm
Visible Width	465mm
Thickness	35mm
X-ray Absorption Coefficient (Aluminum Equivalent)	≤ 0.73mmAL
Max Load Capacity	240kg
Lateral Movement	Manual, 240mm ±20mm
Lateral Locking	Electromagnetic Locking
Longitudinal Movement	Manual, 770mm ±20mm
Longitudinal Locking	Electromagnetic Locking
Vertical Movement	Electric, Min. Height: 770mm ±20mm, Max. Height: 1050mm ±20mm
Vertical Stroke	280mm ±20mm



DST-700G is regular

Carbon fiber electric orthopedic navigation imaging operating table

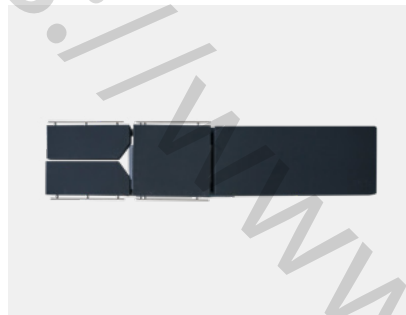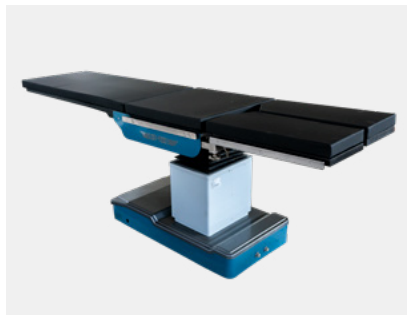

Product Parameter (Specification)

Item	Specification
Bed Size	2350mm (L) × 585mm (W) ±10mm
Min Height (without mattress)	730mm ±20mm
Max Height (without mattress)	1030mm ±20mm
Elevation Range	300mm ±20mm (electric)
Longitudinal Shift	250mm ±20mm (electric)
Head Tilt Angle	20° ±2° (electric)
Foot Tilt Angle	20° ±2° (electric)
Lateral Tilt Angle	Left 25° ±2°, Right 25° ±2° (electric)
Backrest Angle	Up 60° ±2°, Down 20° ±2° (electric)
Leg Plate Angle	Up 35° ±5° (manual), Down 90° ±5° (manual)
One-Touch Reset Function	Yes
Max Load Capacity	300kg
Electric Brake System	Yes
Battery Capacity	50-80 surgeries on full charge

04 Gynecological Operating Table

DST-3003 Deluxe Edition

Low noise gynecological examination and delivery luxury operating table

Product Parameter (Specification)

Item	Specification
Table Size	2058mm (L) × 1080mm (W) × 550mm (H)
Minimum Height	550mm ±10mm
Net Weight	305kg
Power Supply	AC 230V, 2.5A, 50Hz
Elevation Range	360mm ±10mm (electric)
Backrest Angle	Up 60° ±2° , Down 10° ±2° (electric)
Seat Angle	Up 25° ±2° , Down 25° ±2° (electric)
Foot Support Plate Rotation Angle	Right 0° ~ 33° ±3° , Left 0° ~ 33° ±3° (electric)
Foot Support Plate Angle	0° ~ 90° ±2° (manual gas spring)
Leg Plate Angle	75° ±2° (manual)
Side Armrest Rotation Angle	180° (manual)
Tray Support Plate Horizontal Movement	150mm ±3mm (manual)
Tray Support Plate Rotation Angle	90° ±3° (manual)
Rotating Tray Support Plate Horizontal Movement	60mm ±5mm (manual)



DST-3003

High quality multi-purpose economical gynecological operating table




Product Parameter (Specification)

Item	Specification
Table Size	2058mm (L) × 1080mm (W) × 550mm (H)
Minimum Height	550mm ±10mm
Net Weight	305kg
Power Supply	AC 230V, 2.5A, 50Hz
Elevation Range	360mm ±10mm (electric)
Backrest Angle	Up 60° ±2° , Down 10° ±2° (electric)
Seat Angle	Up 25° ±2° , Down 25° ±2° (electric)
Foot Support Plate Rotation Angle	Right 0° ~ 33° ±3° , Left 0° ~ 33° ±3° (electric)
Foot Support Plate Angle	0° ~ 90° ±2° (manual gas spring)
Leg Plate Angle	75° ±2° (manual)
Side Armrest Rotation Angle	180° (manual)
Tray Support Plate Horizontal Movement	150mm ±3mm (manual)
Tray Support Plate Rotation Angle	90° ±3° (manual)
Rotating Tray Support Plate Horizontal Movement	60mm ±5mm (manual)



DST-5

Streamlined and flexible adjustable gynecological electric operating table

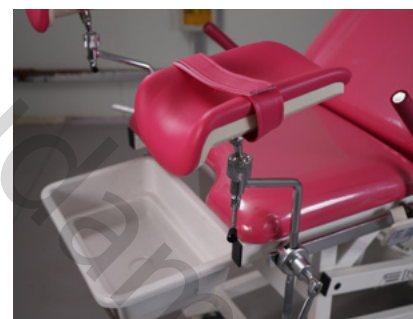

Product Parameter (Specification)

Item	Specification
Model	DST-5
Length	1380mm (without auxiliary plate) 1880mm (with auxiliary plate)
Width	600mm
Maximum Table Height	950mm (with mattress)
Minimum Table Height	570mm (with mattress)
Maximum Backward Tilt	12°
Backrest Upwards Angle	60°
Auxiliary Plate Size	560mm x 500mm (optional)




DST-5A

A3 steel welding process, hand cranked paper adjustable electric gynecological operating table



Product Parameter (Specification)

Item	Specification
Model	DST-5 (A Model)
Length	1680mm (without auxiliary plate)
Width	1040mm
Maximum Table Height	850mm (with mattress)
Minimum Table Height	570mm (with mattress)
Backrest Angle	Up 65°
Footrest Rotation	180°

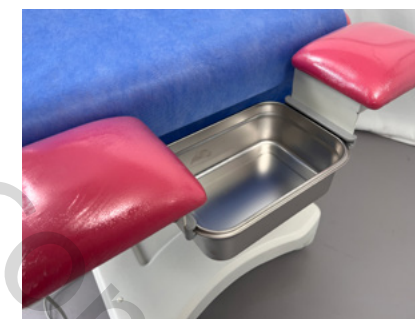

AF03 Electric model

Electric lifting American gynecological electric operating table



Product Parameter (Specification)

Parameter	Specification
Tabletop Size	1520mm × 720mm
Table Height	650-900mm
Backrest Maximum Angle	70° ±5°
Seat Maximum Angle	7° ±2°
Elevation Range	250mm

05 Electric Operating Table

AFO3 Manual version

A3 steel welding process, hand cranked paper adjustable electric gynecological operating table



Product Parameter (Specification)

Item	Specification
Table Size	1520mm (L) × 740mm (W)
Table Height	900mm
Backrest Angle	Up to 70° ±5°
Seat Angle	Up to 7° ±2°
Footrest Size	450mm × 230mm
Outer Packaging Dimensions	1250mm × 680mm × 900mm
Mattress Packaging Dimensions	1590mm × 800mm × 200mm
Weight Capacity	220kg

